

LAMP .308 lampada con 40 LEDS RGB FULL COLOR:

APPLICAZIONI DI LAMP .308-RGB

Questa lampada illuminante cambia colore dotata di lenti può avere applicazioni in contenitori standard di lampade tradizionali .
Può essere usata per applicazioni di illuminazione architettuale , TV , palcoscenici .

Questa lampada funziona in bassa tensione 28vdc e si controlla in PWM , integrando tutta la parte di alimentazione dei led a corrente costante .


Può essere pilotata dal modulo DDS.282 , DDS.289 , oppure dal modulo DDS.344.

Le lenti sono installabili esternamente tramite telaio , la scheda necessita di una parte di alluminio per dissipare il calore .

Technical specification :

Power supply 28vdc 5A
input PWM RGB
led 70lm
double side adhesive for heat sink application
screw driver connection for supply and control
constant current led supply on board
lens holderexternal
operating temperature 70 degree C ambient
size 19cmt x 24,5cmt

250LUX at 5mt with all colour on and medium lens

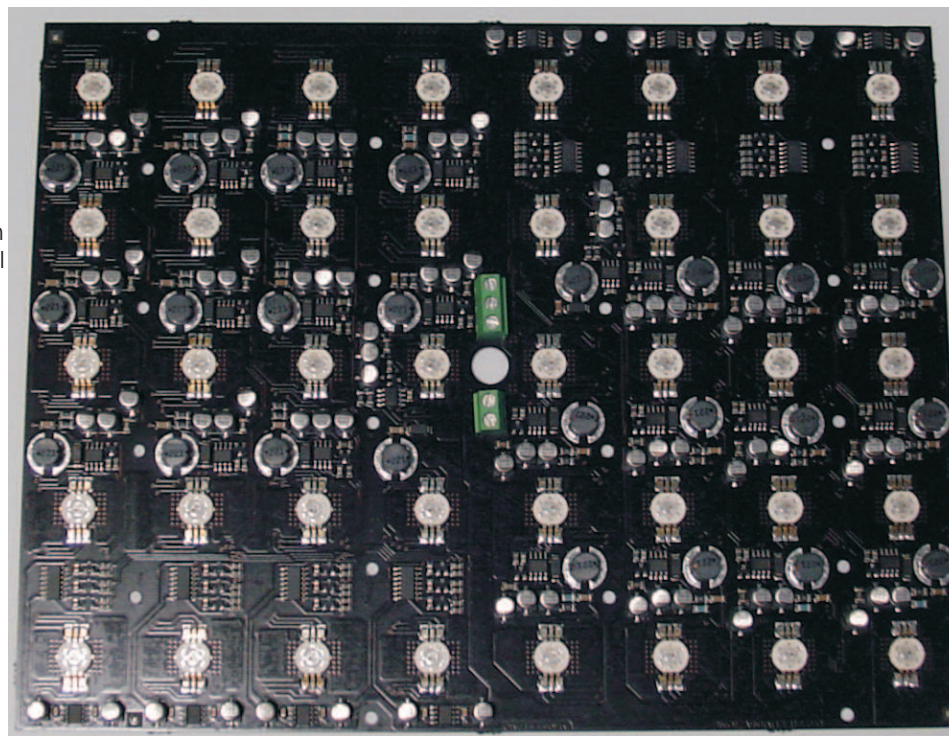



LAMP .308 I 40 LEDS RGB FULL COLOR:

This is a lamp suitable for fitting in standard housing, heat sink is necessary for the power led , and mechanical lens holder too.

The Lamp308 use a low voltage (28vdc) and PWM signal to control the colours, the led power supply is embedded on the board .


The Driver for this lamp can be DDS.282 , DDS.289 , or DDS.344.

Application example

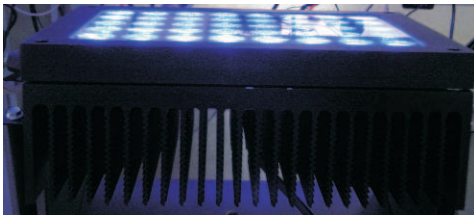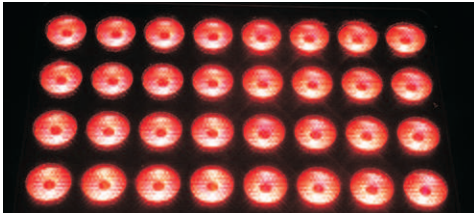

Heat sink example

DDS Elettronica si riserva di apportare, senza preavviso, modifiche ai suoi prodotti in favore di un costante perfezionamento degli stessi.
DDS Elettronica reserves itself the right to modify its products without notice for the constant improvements of its production.



PWM rgb and supply

DDS282PWM RGB driver



DMX

Main
90-260vac

