

DDS Elettronica si riserva di apportare, senza preavviso, modifiche ai suoi prodotti in favore di un costante perfezionamento degli stessi.
DDS Elettronica reserves itself the right to modify its products without notice for the constant improvements of its production.

DDS.222 E' UN ALIMENTATORE SWITCHING PER APPARECCHI ILLUMINANTI A LED E PER ALTRE APPLICAZIONI

DDS.222 è un potente alimentatore AC che dispone di due uscite a 24Vdc/3A.
La scheda è programmabile su richiesta con tensioni tra 1 3 ed 1 24Vdc.

caratteristiche INPUT:

- tensione: 18/24Vac
- corrente massima: 6A suddiviso in 2 uscite

caratteristiche OUTPUT:

- tensione: Vo 24Vdc massima
- corrente: 3A + 3A

ambiente di utilizzo:

- temperatura ambiente: Top -10° to +54°C
- temperatura di stoccaggio: Tst -20° to +85°
- temperatura scatola: Tc +65°
- umidità relativa: RH 80%

DDS.222 IT IS A SWITCHING POWER SUPPLY FOR LED LIGHTING FITTING AND OTHERS APPLICATIONS

DDS.222 it is an AC switching with two 24Vdc/3A output line .

DDS.222 it is programmable in advance with the output from 3 to 24Vdc.

INPUT electrical spec

- input Voltage range: Vin 18/24Vac
- Power consumption range: 6A divided in 2 line



OUTPUT electrical spec

- Output Voltage: Vo 24Vdc maximum
- Power Output range: 3A plus 3A

environmental

- operating temperature: Top -10° to +54°C
- storage temperature: Tst -20° to +85°
- case temperature: Tc +65°
- relative humidity: RH 80%



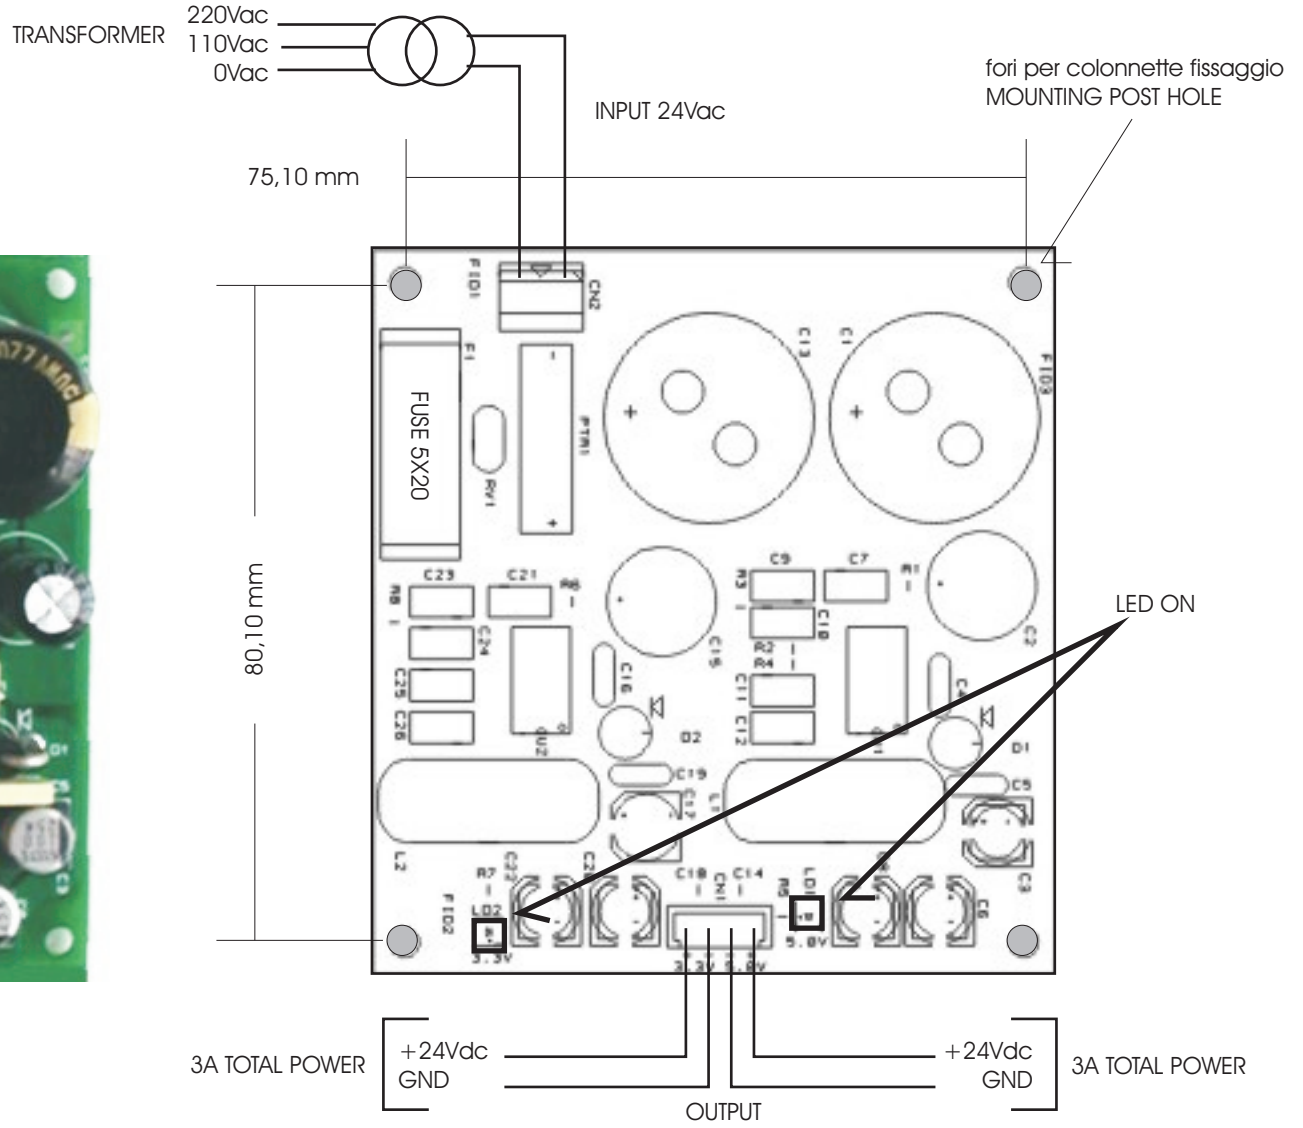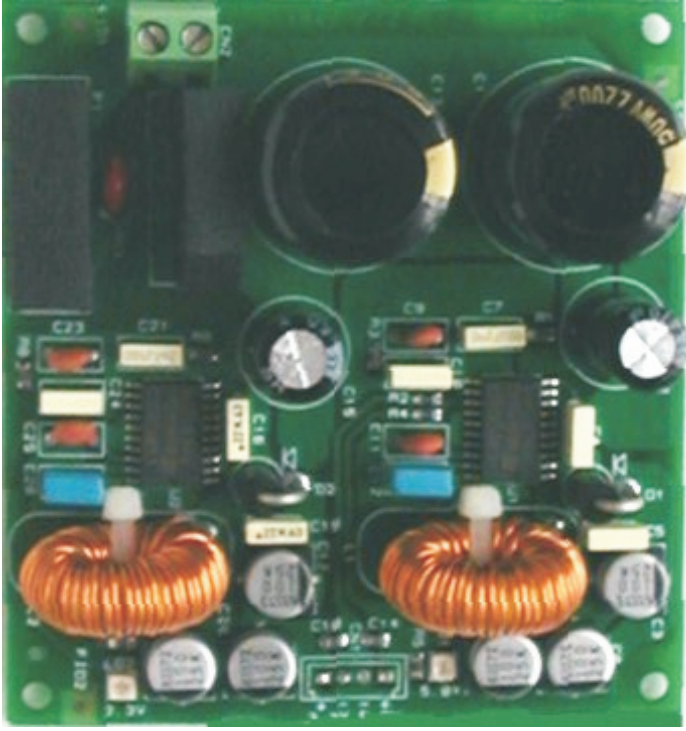

SHAPE DIMENSIONS OF DDS.222

