



DDS Elettronica si riserva di apportare, senza preavviso, modifiche ai suoi prodotti in favore di un costante perfezionamento degli stessi.  
DDS Elettronica reserves itself the right to modify its products without notice for the constant improvements of its production.


DDS.365 E' un alimentatore a corrente costante per led da 1w o 3w , questo funziona anche con tensioni in ingresso alternate fino a 18vac.  
E' possibile collegare più led in serie sull'uscita.  
Questo modulo è disegnato per applicazioni dentro lampade o corpi illuminanti ,le connessioni vanno eseguite saldando sulla scheda cavi , su richiesta possono essere fornite lunghezze cavi speciali già saldati .

Electrical Specification and operating environment:

- Voltage input 12-24Vdc or 8-18 Vac
- max output current 600mA
- max led in series @24vdc or 18vac input 3x1w or 2x3w
  
- Top -10° to +54°C
- Tst -20° to +85°
- Tc +65°
- RH 80%

DDS.244 It is a constant current switching power supply for led 1-3w , this module is capable to work also in AC voltage from 8-18.  
Is possible to connect in series up several leds.  
This module is especially designed for embedded application , inside lamp ,wiring must be soldered on the PCB , on request cable length presoldered are available .



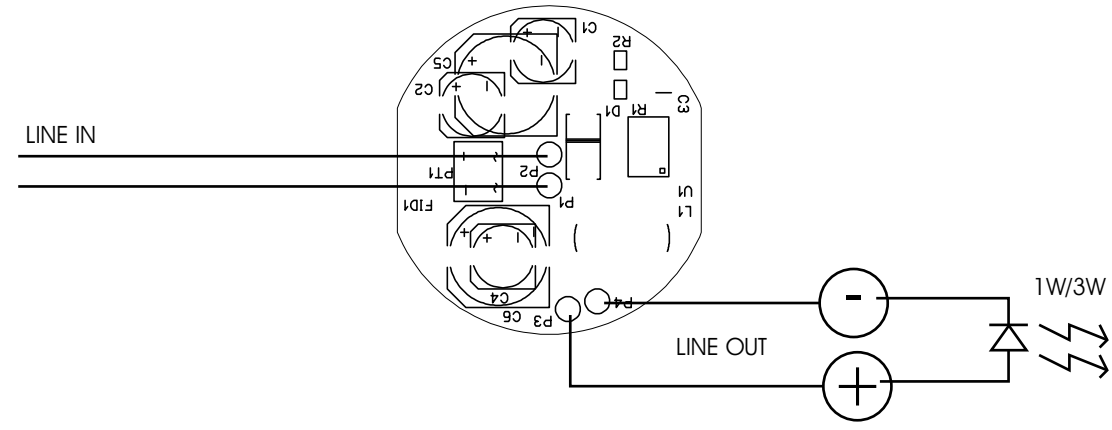

La scheda DDS.365 viene fornita su richiesta con biadesivo sul retro per fissaggio al supporto del cliente.

DDS.365 HAVE - ON REQUEST - DOUBLE SIDE ADHESIVE TAPE ON THE BACK TO BE FIXED ON THE CLIENT SUPPORT

SHAPE DIMENSIONS OF DDS.365

